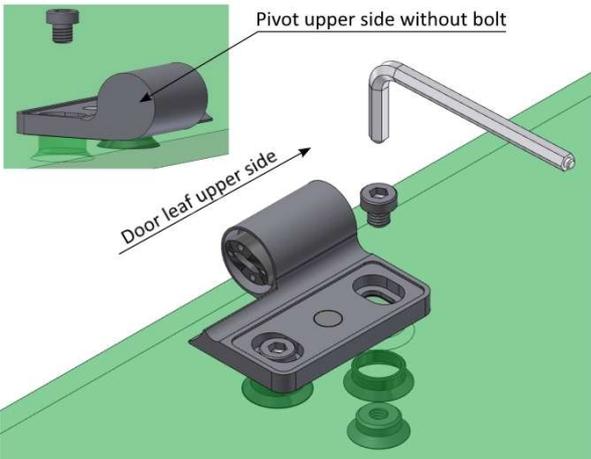
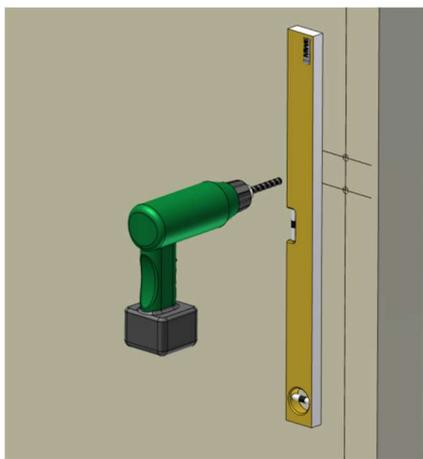





# Installation Instructions

## Shower hinges Spirit (DU.3342)

	<h3>Tool</h3> <ul style="list-style-type: none"><li>- water level</li><li>- measuring tape</li><li>- power drill</li><li>- drill, diameter=8mm / diameter=10mm</li><li>- crosstip screwdriver</li><li>- allen key set</li><li>- jaw wrench (size=10 mm)</li><li>- pads</li></ul> <p>Please read power drill safety instructions carefully prior to installation.</p>
	<h3>1</h3> <h4>Hinge installation on the door panel</h4> <p>Place the door panel on the assembling stand. Loosen the bolts of the countersink mount. Place the bolts in the appropriate glass holes and screw together with the upper hinge component. Vernier adjustment can be performed later using the long-hole adjustment.</p> <p><u>You can remove the magnetic cap of the countersunk fittings by using the suction cup that is enclosed to delivery.</u></p>
	<h3>2</h3> <h4>Drill holes in the wall</h4> <p>Please drill the wall holes according to the enclosed drawing. The holes should be placed as accurate as possible in a vertical row to each other. Use the hinges as a template and align then using a water level.</p> <p><u>You can remove the magnetic caps using the suction cup that is enclosed to delivery.</u></p>

# Installation Instructions


## Shower hinges Spirit (DU.3342)

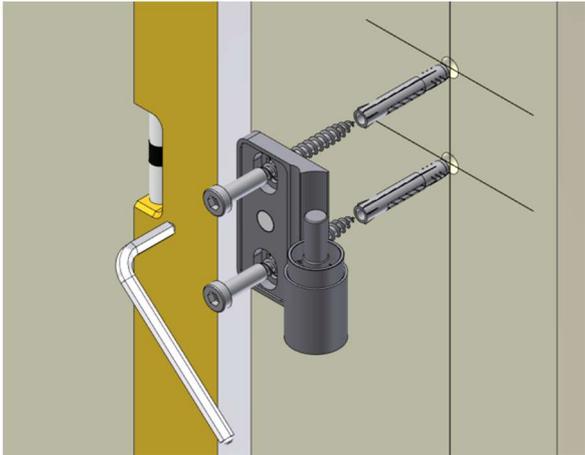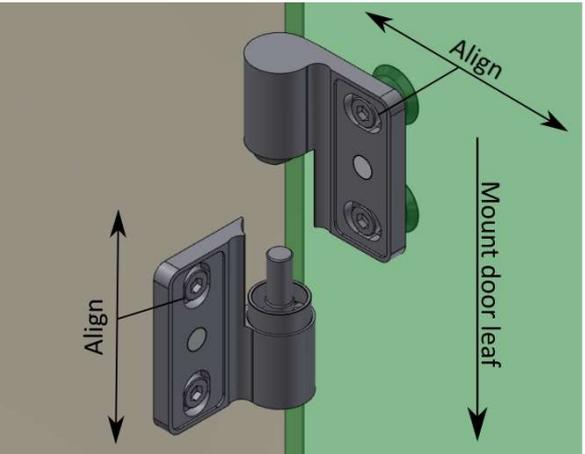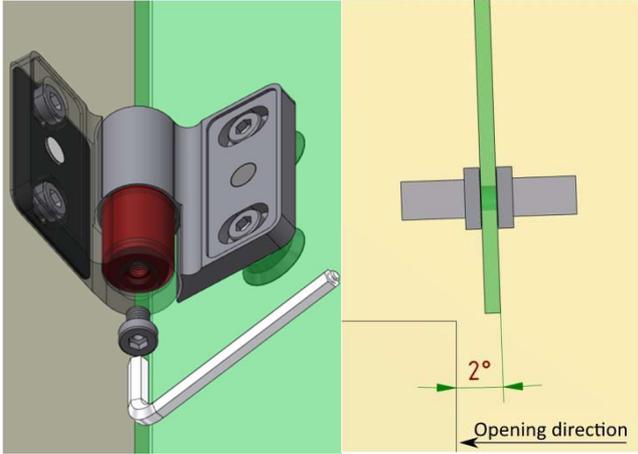	<h3>3</h3> <h4>Hinge installation to the wall</h4> <p>Insert the anchors into the drill holes in order to align and screw the hinge parts to the wall. Use the water level and adjust the hinge then tightening.</p>
	<h3>4</h3> <h4>Hinging and aligning the door</h4> <p>You can hook in door panel in the next step. Put the door panel on pads to align. Align and find the right door position by adjusting the door panel inside the long holes. Tighten the bolts afterwards.</p> <p><b>ATTENTION!</b> The door panel must not swing! -&gt; <b>DANGER OF GLASS DAMAGE!</b> The door panel must be secured as long as the door stop is not yet installed.</p>
	<h3>5</h3> <h4>Adjusting the zero position</h4> <p>The zero position should be at around 92 degree to adjust the lifting function correctly. That will make sure that the door panel will later always push against the door stop and close properly. Please loosen the set screws at the bottom of the hinge till the inner sleeve (shown in red) can move freely. Then turn the door panel into the desired closing position or approximately 2 degree further in. Now tighten the sleeve with the adjusting screws.</p> <p>► Check, if it works properly.</p>

# Installation Instructions

## Shower hinges Spirit (DU.3342)

Am Steinbusch 7  
D-48351 Everswinkel  
Tel.: +49(0)2582-9960- 0  
Tel.: +49(0)2582-9960-128  
Internet: [www.mwe.de](http://www.mwe.de)

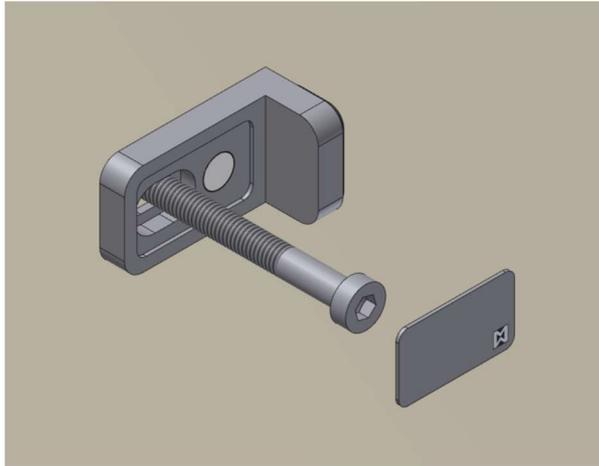

### 6

#### Installation of the door stop

Install the door stop at the proper position.



### 7

#### Tighten the screws and check the function

In the last step, all screws should be re-tightened, if necessary.

Now put the magnet caps back and re-check, if the door panel operates properly.