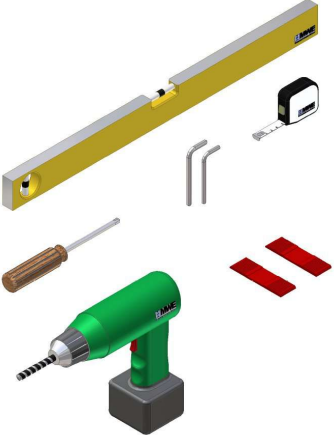
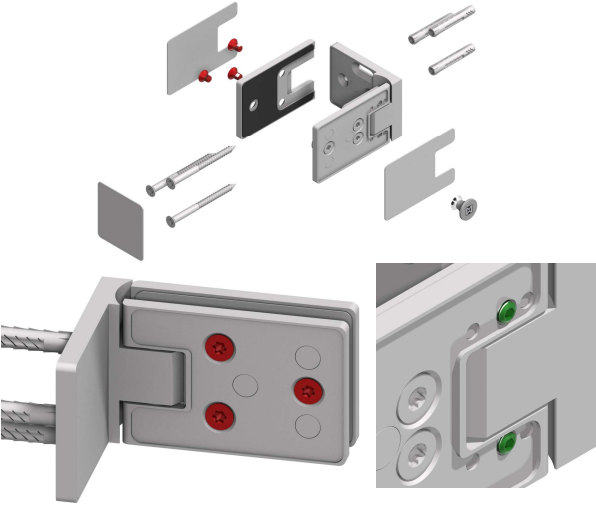
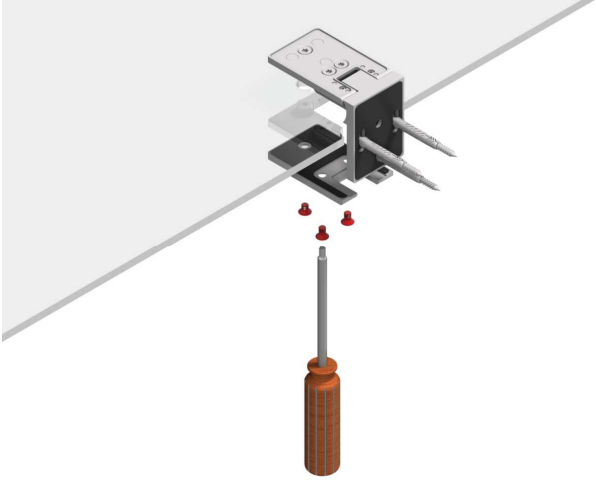


# Installation instructions

## Spring hinge Sirio (DU.3390)


Am Steinbusch 7  
D - 48351 Everswinkel  
Tel.: +49(0)2582-9960- 0  
Tel.: +49(0)2582-9960-128  
Internet: www.mwe.de

	<h2>Tools</h2> <ul style="list-style-type: none"><li>- water level</li><li>- measuring tape</li><li>- drilling machine</li><li>- masonry drill 10mm dia.</li><li>- set of Allen keys</li><li>- Torx wrench</li><li>- glass pads</li></ul> <p>Please read safety instructions carefully before using the drilling machine.</p>
	<h2>1</h2> <h3>Prearrangement for the installation</h3> <p>Please remove the magnetic caps and the clamping jaw before you start installing. Remove the red marked screws as shown in the illustration. Keep the green screws just loosened.</p> <p>Please use the enclosed vacuum cup to remove magnetic caps. This is to ensure the finish remains undamaged.</p>
	<h2>2</h2> <h3>Installation of the hinges</h3> <p>Now you can attach the hinges to the door panel. Put the hinge in the glass cut-out and fix the clamping jaw using the three red countersunk screws (see the illustration on the left). Tighten the screws slightly so the hinges can be still moved around a little. The hinge plates of both hinges should be align. Tighten the countersunk screws once both hinges are align.</p>

# Installation instructions

## Spring hinge Sirio (DU.3390)

Am Steinbusch 7  
D - 48351 Everswinkel  
Tel.: +49(0)2582-9960- 0  
Tel.: +49(0)2582-9960-128  
Internet: www.mwe.de

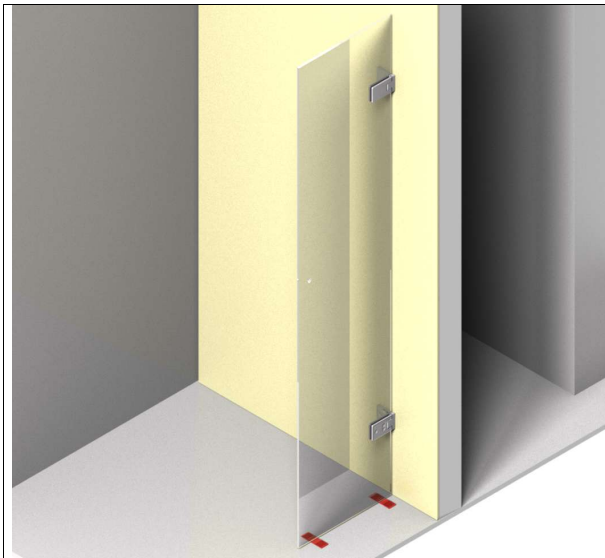


### 3

#### Setting up the door

Put the pads underneath the door panel and set it up. Use the water level to align the door panel. Once the door panel is set up, copy the fixing marks on the wall / door frame. Remove the door and make the drillings at the marked locations. Use enclosed screw anchors insofar as the building substance allows to.

Attention:


Use 7-10 mm pads depending on floor conditions.

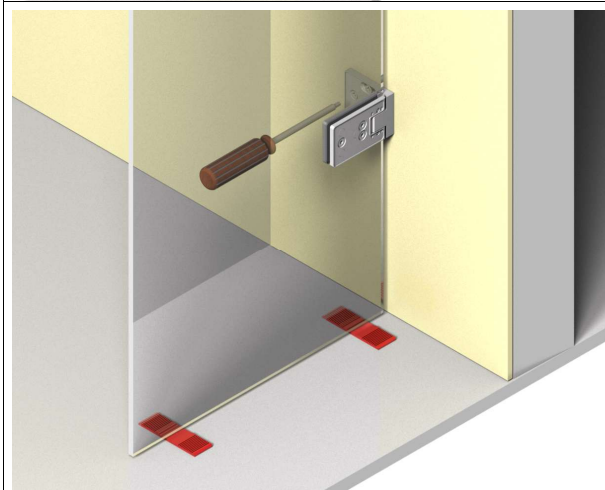

### 4

#### Installation of the door panel

Again use the pads to set up the door panel and screw it. Remove the pads and make a test. Please adjust, if required.

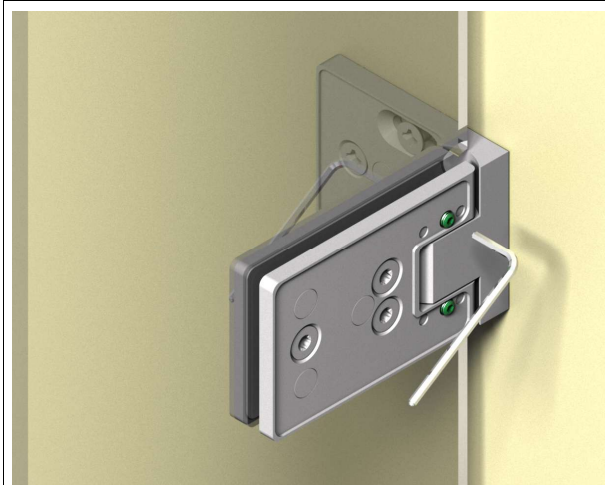

### 5


#### Adjusting the zero position

Move the door panel to the required zero position. Then tighten the grub screws to lock the position.

# Installation instructions

## Spring hinge Sirio (DU.3390)

Am Steinbusch 7  
D - 48351 Everswinkel  
Tel.: +49(0)2582-9960- 0  
Tel.: +49(0)2582-9960-128  
Internet: [www.mwe.de](http://www.mwe.de)

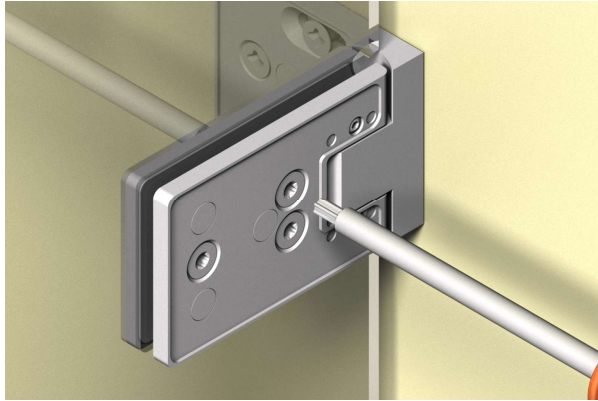

### 6

#### Re-tightening

Once the installation is finished, re-tighten all screws and insert the magnetic caps.

At last you can now put the seals on.