



Technical drawings are subject to change without notice.
All millimeter dimensions are exact and supersede inch conversions.

Copyright MWE NA Inc., all rights reserved. Reproduction or other use of these designs without written consent from MWE NA Inc. is prohibited.


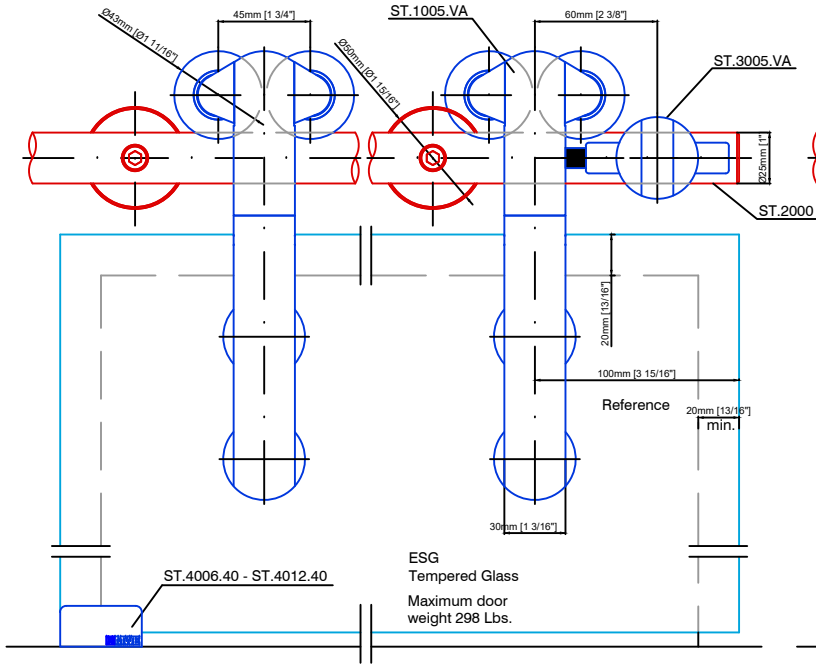


ESG
Tempered Glass
Maximum door
weight 298 Lbs.

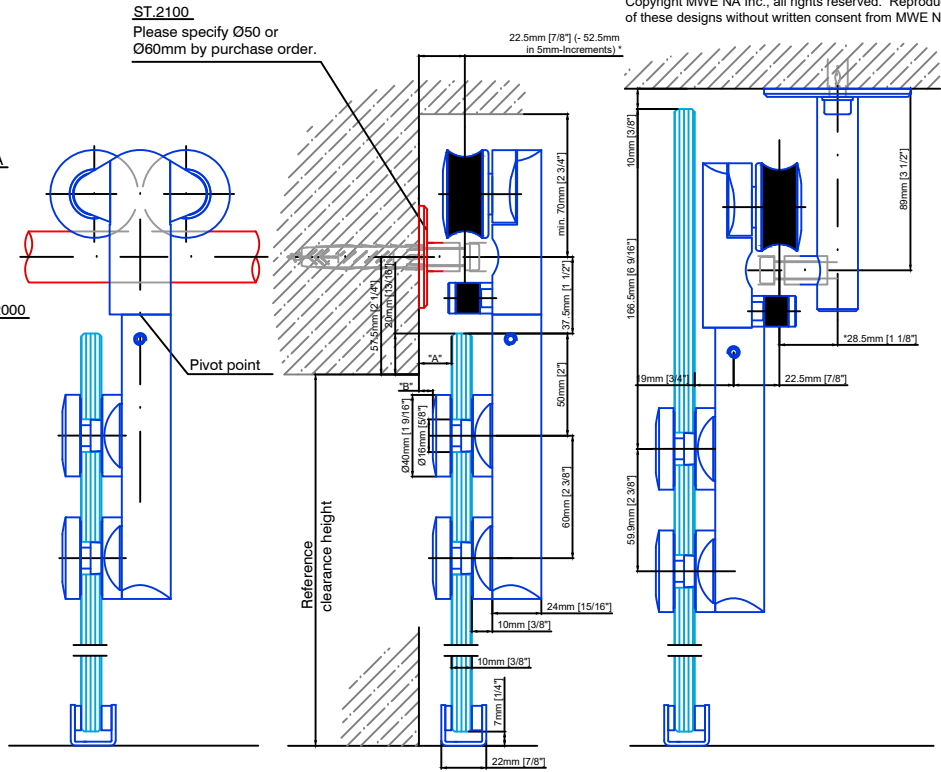


ST.2100
Please specify Ø50 or
Ø60mm by purchase order.

Example:
-curved sliding track
-curved Glass

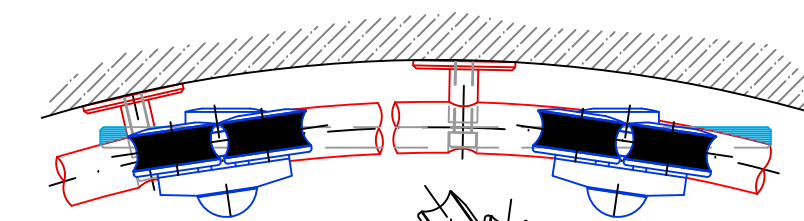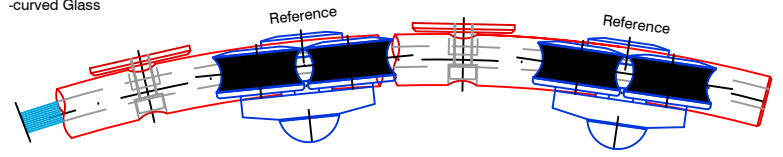


Example:
- Curved sliding track
- Flat Glass




Glass		8mm	10mm	12mm
dimension	A	18mm	16mm	14mm
	B	9mm	7mm	5mm

Glass		5/16"	3/8"	1/2"
dimension	A	11/16"	5/8"	9/16"
	B	3/8"	1/4"	3/16"

Floor guide using a curved
sliding track with flat Glass.

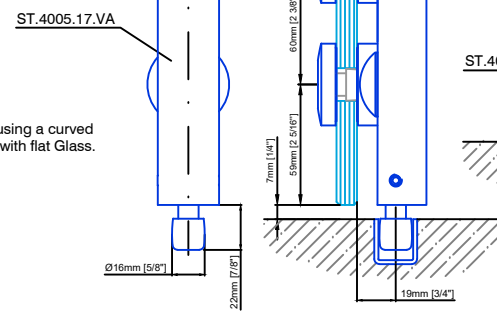

Door Type:
Floor guide for use with curved
wooden door leaves

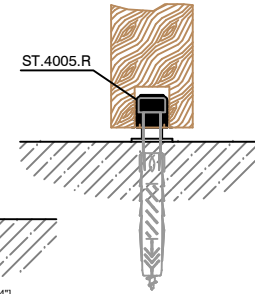

Vario ST.1005.VA

Date Prepared: July 2018

Prepared By: CDA | JRT



Email: info@mwe-na.com
www.mwe-na.com